



® Knowledge  
Beyond  
Measure.



# Real-Time Dust Monitoring Solutions from TSI®

Meeting the real-time challenges of the  
OSHA's respirable silica standard





# Real-Time Dust Monitoring and Compliance to OSHA's Silica Standard

In OSHA's General Industry and Construction Respirable Crystalline Silica Standards (RCS Standard) employers must conduct monitoring to assess each employee's eight-hour, time-weighted average (TWA) exposure to respirable crystalline silica dust.

The Permissible Exposure Limit (PEL) along with the "Action Level", present challenges for companies to monitor, control and reduce worker exposure to respirable silica.

Direct reading, real-time instruments from TSI® will allow you to easily measure respirable silica dust for employee exposure assessments, validating corrective actions and performing repetitive sampling in real-time while saving time and reducing costs.


## OSHA Standard For Respirable Silica

**PEL** =  $50\mu\text{g}/\text{m}^3$  at 8hr. TWA

**Action Level** =  $25\mu\text{g}/\text{m}^3$  at 8hr. TWA

## Navigating the OSHA Silica Standard— a Faster Path to Compliance

From Table-1 compliance through the Alternative Exposure Control Methods, TSI® real-time monitoring technology provides a faster pathway to compliance, cost savings and improved safety along the way. Gain confidence in your gravimetric lab results before taking the final samples.

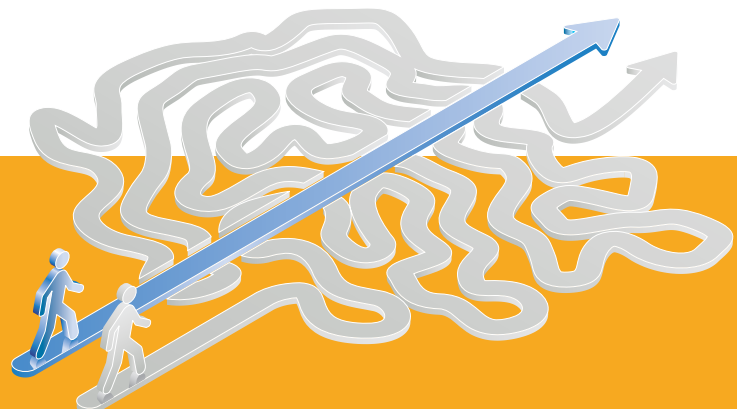

# Measuring Respirable Silica Dust in Real-Time

Within OSHA's standard companies and facilities may have to monitor respirable silica frequently to reach and maintain compliance while protecting employees from silica exposure.

Traditional gravimetric sampling is required for reference samples, however lab processing takes time, is costly and does not provide exposure data needed to make fast corrective actions.

TSI® manufactures a broad line of real-time dust measurement instruments that can help reach and maintain compliance to the silica standard in less time and for less cost.

## Real-Time Dust Monitoring Provides Real-Time Advantages:



- Reduced Set-up and Sample Collection Times:**

Real-time dust measurements can collect 'representative' samples in far less time than traditional gravimetric sampling.

- Fast Corrective Action: Achieve in Hours or Days**

What typically takes weeks or even months to complete using only gravimetric sampling. Real-time monitoring provides instant and actionable exposure data.



- Real-Time Sampling Allows for Frequent Repetitive Monitoring**

Repeated testing required by several sections of the OSHA standard.

- Real-Time Data-logging**

Provides employers with an exposure 'data trail' of employee exposure levels including alarm conditions for post-test review and pinpoint analysis of exposure during an entire work shift.



- Instant Alerts and Exposure Data**

Real-Time monitoring provides immediate results to make decisions, take corrective actions and validate those actions so further adjustments can be made.

- Reduced Worker Exposures**


Keeps workers safe through accurate, immediate feedback of workplace conditions while saving your company money.

## Sampling Method Comparison


The diagram below illustrates the potential time and cost savings through real-time monitoring. More cycles maybe required to make and validate corrective actions before compliance of the new OSHA standard is met.

### Gravimetric Sampling: 17-31 Days

Two rounds of sampling to prove compliance (repeat until in compliance)

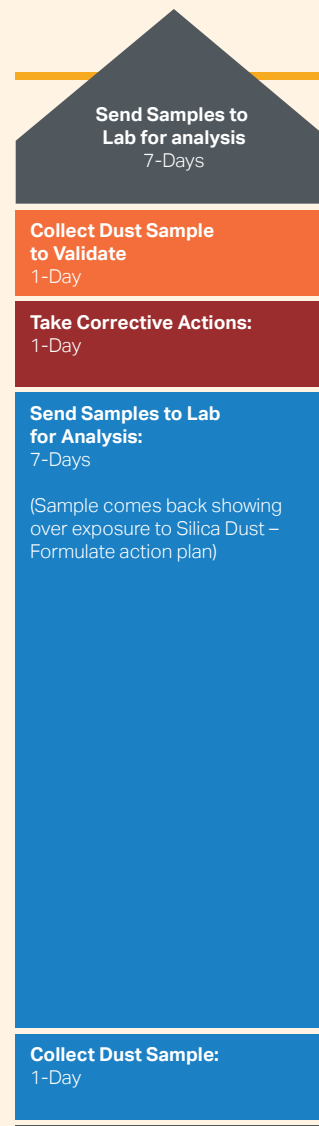


### Real-Time Monitoring Involves:

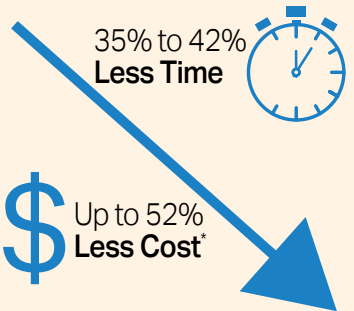

### Real-Time Monitoring: 11-18 Days

Two rounds of sampling to prove compliance

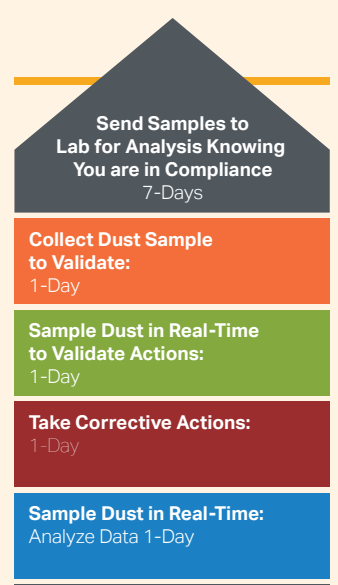

\* TSI Estimates, when using consultants


# Real-Time Dust Monitoring Solutions From TSI®

Meeting The Real-Time Challenges Of The Osha Silica Standard



Product Name	SidePak™ AM520 Personal Aerosol Monitor	DustTrak™ II Aerosol Monitor - Desktop	DustTrak™ II Aerosol Monitor – Handheld	Environmental DustTrak™ II Aerosol Monitor	DustTrak™ II Environmental Enclosure Model 8535
<b>Intended Application</b>	Personal Exposure Monitoring of worker breathing zone as worker performs tasks	DustTrak II for work area monitoring with gravimetric sample cassette for developing custom calibration factors	Hand Held DustTrak for walk-through facility surveys and point source dust detection	Pole mounted for extended outdoor dust monitoring of fugitive dust along fence-lines, job sites and large outdoor areas	Tripod mounted for extended outdoor dust monitoring of fugitive dust on job sites and large outdoor areas  Portable and can be accessorized for long term outdoor monitoring in all weather
<b>Key Features</b>	<ul style="list-style-type: none"> <li>Dual display and logging of mass concentration and response concentration on one screen simultaneously</li> <li>Small, lightweight with belt-clip</li> <li>Exposure alarms and alerts</li> <li>Data logging and report creation software</li> <li>12 hour run-time batteries</li> </ul>	<ul style="list-style-type: none"> <li>Desktop design</li> <li>In-line gravimetric sample collection</li> <li>Alarms</li> <li>20 hour continuous data logging</li> <li>Report creation software</li> </ul>	<ul style="list-style-type: none"> <li>Convenient hand-held, portable design</li> <li>Real-time dust monitoring</li> <li>Continuous Data logging w/ single data point capture</li> <li>Durable and precise</li> </ul>	<ul style="list-style-type: none"> <li>Respirable dust in real-time</li> <li>Near-reference precision and accuracy</li> <li>Wireless/cloud connectivity</li> <li>Long term - 24hr. outdoor all-weather monitoring</li> <li>High concentration levels</li> </ul>	<ul style="list-style-type: none"> <li>Respirable dust in real-time</li> <li>Portable</li> <li>Wireless/cloud connectivity</li> <li>Long term - 24hr. Outdoor all-weather monitoring</li> <li>High concentration levels</li> </ul>

DustTrak and SidePak are trademarks, and PortaCount, TSI, the TSI logo are registered trademarks of TSI Incorporated in the United States and may be protected under other country's trademark registrations.

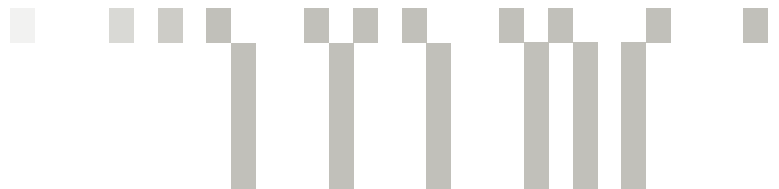

**Knowledge Beyond Measure.**

TSI Incorporated - Visit our website [www.tsi.com](http://www.tsi.com) for more information.

**USA** Tel: +1 800 874 2811  
**UK** Tel: +44 149 4 459200  
**France** Tel: +33 1 41 19 21 99  
**Germany** Tel: +49 241 523030  
**India** Tel: +91 80 67877200  
**China** Tel: +86 10 8219 7688  
**Singapore** Tel: +65 6595 6388



Distributed by:

Kenelec Scientific Pty Ltd  
 1300 73 22 33  
[sales@kenelec.com.au](mailto:sales@kenelec.com.au)  
[www.kenelec.com.au](http://www.kenelec.com.au)