



The FCS-32 is a sophisticated, high performance system controller that offers up to 32 gas channel configurations for monitoring toxic, combustible or refrigerant gases with versatile control functionality for non-hazardous, non-explosion rated, commercial and light industrial applications. The FCS-32 is designed to accept inputs from digital and/or analog transmitters and/or Peripheral Devices (in various combinations), using Modbus® RTU RS-485 or 4-20 mA analog input.

The FCS-32 is available in two models: FCS-32-M with Modbus® RTU RS-485 output or the FCS-32-B with BACnet® MS/TP RS-485 output for communicating with a Building Automation System (BAS).

Standard features include, 4 internal SPDT dry contact relays, 2 dedicated horn/strobe drives, a full colour LCD resistive touch screen with an LED panel indicating channel alarm status, relay status and fault conditions, an extensive menu system with password protection, enhanced logic control, priorities / zoning capabilities, a USB port for firmware upgrades, data logging and a door-mounted audible alarm.


Optional value added features include, analog inputs and/or analog outputs, a top mounted strobe, a locking door, manual shut off switch, and a water tight audible alarm.

The FCS-32 can be configured to comply with California Title-24 Building Energy Efficiency Standards. Specification details need to be given at time of order and additional settings can be implemented in the field as required.

### KEY FEATURES

- » Up to 32 channels of gas readings
- » Graphic, full colour, resistive touch LCD display with LED indicators
- » Data logging
- » Four internal SPDT dry contact relays
- » 2 horn/strobe output drives
- » Up to 8 configurable internal analog inputs (optional) and/or analog outputs (optional)
- » Modbus® RTU RS-485 LAN protocol for communicating with transmitters and Peripheral Devices
- » Modbus® RTU RS-485 (FCS-32-M) or BACnet® MS/TP RS-485 (FCS-32-B) WAN output for communicating with a BAS or DDC
- » Supports 4-20 mA and Modbus® driven VFDs
- » Enhanced logic control, zoning and priorities capabilities
- » USB port for firmware upgrades
- » Configurable compliance with California Title-24 Building Energy Efficiency Standards
- » Standard water / dust tight, corrosion resistant enclosure (drip proof), with optional lockable door. IP54 rating with door mounted, water tight buzzer installed.
- » RoHS compliant circuit boards

### TECHNICAL DRAWING

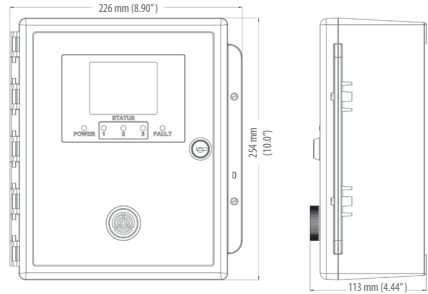

Note: Drawings above are shown with the optional door lock.

### APPLICATIONS

- » Enclosed Parking Facilities
- » Food Processing Plants
- » Chemical Storage Rooms
- » Vehicle Maintenance Shops / Bus Barns
- » Warehouse Distribution Centers
- » Greenhouse Production Facilities
- » ... and many more

### TECHNICAL SPECIFICATIONS

#### MECHANICAL

##### Enclosure

ABS / Polycarbonate, IP54 rating with door mounted, water tight buzzer installed, copper coated interior to reduce RF interference

##### Weight

1.8 kg / 4 lbs

##### Size

254 x 226 x 113 mm  
10.0 x 8.9 x 4.44 in

#### USER INTERFACE

##### Display

8.1 cm (3.2") graphic, 1/4 VGA full colour resistive touch LCD screen with LED indicators for "POWER", "STATUS 1, 2 and 3" and "FAULT"

#### INPUT / OUTPUT

##### Input

- 4-20 mA analog input (optional)  
- Modbus® RS-485 input

##### Output

- Modbus® RTU RS-485 WAN (model: FCS-M)  
- BACnet® MS/TP WAN (model: FCS-B)  
- Modbus® RTU RS-485 LAN  
- Two drive outputs for strobe/horn e.g. RSH-24-R (0.5 A @ 24 VDC max)  
- Field configurable Analog Output 4-20 mA or 0-10 volts (optional)

##### Relays

Four internal SPDT dry contact relays rated 5 A @ 240 VAC

##### Audible Alarm

- Standard loud, door mounted buzzer, rated 90 dB @ 30 cm (1 ft)  
- Optional door mounted, water tight buzzer, rated 85 dB @ 60.96 cm (2 ft)



# GAS DETECTION CONTROLLERS DATASHEET

## FCS System Controller – 32 Channels

FIXED SYSTEMS

### TECHNICAL SPECIFICATIONS CON'T

#### ELECTRICAL

**Power Requirement** Line Voltage 90 - 240 VAC  
50 - 60 Hz, 75 W

**Power Distribution** Total power available to Options,  
Remote and Peripheral Devices  
65 W @ 24 VDC

**Wiring**

- VAC (line voltage) 3-conductor shielded
- LAN Modbus® RTU RS-485 4-conductor shielded
- WAN (output to BAS only): 4-conductor, 16 AWG, stranded shielded Modbus RTU (version 1.1b3) RS-485 or BACnet MS/TP (version 1 rev 14) RS-485

**Fuses** Thermal, resetting

#### ENVIRONMENTAL

**Operating Temperature** -20°C to 40°C (-4°F to 104°F),  
lower temperature option available

**Humidity** 15 - 90% RH non-condensing

#### CERTIFICATION

Conforms to: CSA-C22.2 No. 205-12, UL508 (Edition 17):2007

Conforms to: EMC Directive 2004/108/EC  
EN 50270:2006, Type 1, EN61010

Conforms to: FCC. This device complies with Part 15 of the FCC Rules.

FCS-B, FCS-B-X models are Listed by BTL  
(where X represents one or more factory installed Options)

### PRODUCT CODES

**FCS-32-M** 32 channel Controller with Modbus® WAN  
output to BAS

**FCS-32-B** 32 channel Controller with BACnet® WAN  
output to BAS

#### OPTIONS (Factory installed) Add at the end of the "Part Number".

**AI** 4 internal 4-20 mA Analog Inputs

**2AI** 8 internal 4-20 mA Analog Inputs

**AO** 4 internal 4-20 mA Analog Outputs (field  
configurable 4-20 mA or 0-10 volts)

**2AO** 8 internal Analog Outputs (field configurable  
4-20 mA or 0-10 volts)

**AIAO** 4 internal Analog Inputs and 4 internal Analog  
Outputs (field configurable 4-20 mA or 0-10  
volts)

**DL** Enclosure door lock and keys

**IH** Internal heater for cold environment  
applications down to -40°C / -40°F

**L** Top mounted strobe, red lens, IP65 rated  
6.1 cm dia x 13 cm H / 2.4 in dia x 5.2 in H)

**SW** Manual shutoff switch (meets B52 Code for  
refrigeration applications)

### PRODUCT CODES

**WA** Door mounted, water tight audible alarm,  
rated 85 dB @ 60.96 cm (2 ft)

#### REMOTE & PERIPHERAL DEVICES

**CET-RDM** Remote Display Module, Modbus® RS-485

**CET-RDM-L2** Remote Display Module with side mounted  
strobe, Modbus® RS-485

**LNK-AI** Analog Input Peripheral Device, Modbus®  
RS-485 with four 4-20 mA inputs

**LNK-AO** Analog Output Peripheral Device, Modbus®  
RS-485 with four 4-20 mA outputs

**LNK-XT** Peripheral Device Network BUS Extender that  
extends the Modbus® RS-485 wire length

**RLY-4** Remote Relay Output, Modbus® RS-485 with  
four relays, rated 5A @ 240 volts each plus 2  
horn/strobe output drives 5A @ 24 VDC max

**RLY-8** Remote Relay Output, Modbus® RS-485 with  
eight relays, rated 5A @ 240 volts each plus 2  
horn/strobe output drives 5A @ 24 VDC max

**RPS-24VDC** Remote Power Supply, provides power to  
extend the network of remote and peripheral  
devices

**RSA-24V** Remote LED strobe light with audible, red lens,  
8.9 cm / 3.5", comes with mounting bracket

**RSH-24V-A** Remote Horn/Strobe Combo, unmounted, 24  
VAC/VDC, rated 99 dB @ 3 m (10 ft) (VAC), 97  
dB @ 3 m (10 ft) (VDC), choice of Amber, Blue or  
Red lens

**RSH-24V-B**

**RSH-24V-R**

**HORN 120V** Surface mount Industrial Horn, rated 78 to 103  
dB @ 3 m (10 ft), includes mounting bracket,  
indoor use only

**HORN 120V-W** Conduit or surface mount Industrial Horn, rated  
78 to 103 dB @ 3 m (10 ft), includes mounting  
bracket, NEMA 4X, indoor or outdoor use

**Maximums**  
32 analog inputs  
60 analog outputs  
20 remote display modules  
6 network extenders

#### ACCESSORIES

**SCS-8000-SPG** Metal protective guard, large, 16 gauge,  
galvanized metal guards for controller

**CET-SS** Wall mounted adjustable outdoor sun shade,  
cover protects from sun, glare and inclement  
weather

NOTE: The maximum number of relays (internal + remote) the FCS-32 can accommodate is 64. The 4 internal relays plus 2 strobe/horn drives plus 1 internal buzzer equals 7 relay connections if all are in use (default). The RLY-4 offers an additional 4 remote relays plus 2 strobe/horn drives and the RLY-8 offers 8 remote relays plus 4 strobe/horn drives. Depending on how many relays are being used and how many strobe/horns are connected will determine the maximum number of RLY-4 or RLY-8 remote relay devices you can connect.



BACnet® is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE). Modbus® is a registered trademark of Gould Inc. Corporation.

© 2024 Critical Environment Technologies Canada Inc. | Data subject to change without notice. | Toll Free: +1.877.940.8741 | www.critical-environment.com | 0426



Distributed by: Kenelec Scientific Pty Ltd | 1300 73 22 33 | sales@kenelec.com.au | www.kenelec.com.au