



The FCS-8 is a sophisticated, high performance system controller that offers up to 8 gas channel configurations for monitoring toxic, combustible or refrigerant gases with versatile control functionality for non-hazardous, non-explosion rated, commercial and light industrial applications. The FCS-8 is designed to accept inputs from digital and/or analog transmitters and/or Peripheral Devices (in various combinations), using Modbus® RTU RS-485 or 4-20 mA analog input.

The FCS-8 is available in two models: the FCS-8-M with Modbus® RTU RS-485 output or the FCS-8-B with BACnet® MS/TP RS-485 output for communicating with a Building Automation System (BAS).

Standard features include, 4 internal SPDT dry contact relays, 2 dedicated horn/strobe drives, a full colour LCD resistive touch screen with an LED panel indicating channel alarm status, relay status and fault conditions, an extensive menu system with password protection, enhanced logic control, priorities / zoning capabilities, a USB port for firmware upgrades, data logging and a door-mounted audible alarm.


Optional value added features include, internal analog inputs and/or analog outputs, a top mounted strobe, a locking door, manual shut off switch, and a water tight audible alarm.

The FCS-8 can be configured to comply with California Title-24 Building Energy Efficiency Standards. Specification details need to be given at time of order and additional settings can be implemented in the field as required.

KEY FEATURES

- » Up to 8 channels of gas readings
- » Graphic, full colour, resistive touch LCD display with LED indicators
- » Data logging
- » Four internal SPDT dry contact relays
- » 2 horn/strobe output drives
- » Up to 8 configurable internal analog inputs (optional) or analog outputs (optional)
- » Modbus® RTU RS-485 LAN protocol for communicating with transmitters and Peripheral Devices
- » Modbus® RTU RS-485 (FCS-8-M) or BACnet® MS/TP RS-485 (FCS-8-B) WAN output for communicating with a BAS or DDC
- » Supports 4-20 mA and Modbus® driven VFDs
- » Enhanced logic control, zoning and priorities capabilities
- » USB port for firmware upgrades
- » Configurable compliance with California Title-24 Building Energy Efficiency Standards
- » Standard water / dust tight, corrosion resistant enclosure (drip proof); with optional lockable door. IP54 rating with door mounted, water tight buzzer installed.
- » RoHS compliant circuit boards

TECHNICAL DRAWING

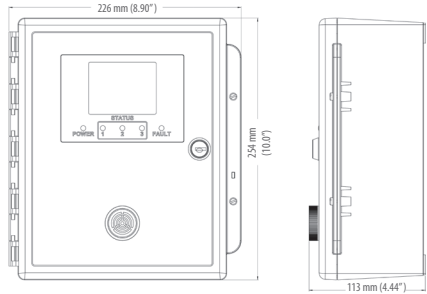

Note: Drawings above are shown with the optional door lock.

APPLICATIONS

- » Cold Storage / Freezer Rooms
- » Chiller Rooms
- » Indoor Recreation Facilities
- » Food Processing Plants
- » Wastewater Treatment Plants
- » Chemical Storage Rooms
- » Wineries, Distilleries and Breweries
- » Vehicle Maintenance Shops / Bus Barns
- » ... and many more

TECHNICAL SPECIFICATIONS

MECHANICAL

Enclosure	ABS / Polycarbonate, IP54 rating with door mounted, water tight buzzer installed, copper coated interior to reduce RF interference
Weight	1.8 kg / 4 lbs
Size	254 x 226 x 113 mm 10.0 x 8.9 x 4.44 in

USER INTERFACE

Display	8.1 cm (3.2\") graphic, 1/4 VGA full colour resistive touch LCD screen with LED indicators for "POWER", "STATUS 1, 2 and 3" and "FAULT"
---------	---

INPUT / OUTPUT

Input	- Modbus® RS-485 input - 4-20 mA analog input (optional)
Output	- Modbus® RTU RS-485 WAN (model: FCS-M) - BACnet® MS/TP WAN (model: FCS-B) - Modbus® RTU RS-485 LAN - Two drive outputs for strobe/horn e.g. RSH-24-R (0.5 A @ 24 VDC max) - Field configurable Analog Output 4-20 mA or 0-10 volts (optional)
Relays	Four internal SPDT dry contact relays rated 5 A @ 240 VAC



GAS DETECTION CONTROLLERS DATASHEET

FCS System Controller – 8 Channels

FIXED SYSTEMS

TECHNICAL SPECIFICATIONS CON'T

Audible Alarm	- Standard loud, door mounted buzzer, rated 90 dB @ 30 cm (1 ft) - Optional door mounted, water tight buzzer, rated 85 dB @ 60.96 cm (2 ft)
----------------------	--

ELECTRICAL

Power Requirement	Line Voltage 90 - 240 VAC 50 - 60 Hz, 75 W
--------------------------	---

Power Distribution	Total power available to Options, Remote and Peripheral Devices 65 W @ 24 VDC
---------------------------	--

Wiring	- VAC (line voltage) 3-conductor shielded - LAN Modbus® RTU RS-485 4-conductor shielded - WAN (output to BAS only): 4-conductor, 16 AWG, stranded shielded Modbus RTU (version 1.1b3) RS-485 or BACnet MS/TP (version 1 rev 14) RS-485
---------------	--

Fuses	Thermal, resetting
--------------	--------------------

ENVIRONMENTAL

Operating Temperature	-20°C to 40°C (-4°F to 104°F), lower temperature option available
------------------------------	---

Humidity	15 - 90% RH non-condensing
-----------------	----------------------------

CERTIFICATION

Conforms to: CSA-C22.2 No. 205-12, UL508 (Edition 17):2007

Conforms to: EMC Directive 2004/108/EC EN 50270:2006, Type 1, EN61010

Conforms to: FCC. This device complies with Part 15 of the FCC Rules.

FCS-B, FCS-B-X models are Listed by BTL (where X represents one or more factory installed Options)

PRODUCT CODES

FCS-8-M	8 channel Controller with Modbus® WAN output to BAS
----------------	---

FCS-8-B	8 channel Controller with BACnet® WAN output to BAS
----------------	---

OPTIONS (Factory installed) Add at the end of the "Part Number".

AI	4 internal 4-20 mA Analog Inputs
-----------	----------------------------------

2AI	8 internal 4-20 mA Analog Inputs
------------	----------------------------------

AO	4 internal 4-20 mA Analog Outputs (field configurable 4-20 mA or 0-10 volts)
-----------	--

2AO	8 internal Analog Outputs (field configurable 4-20 mA or 0-10 volts)
------------	--

AIAO	4 internal Analog Inputs and 4 internal Analog Outputs (field configurable 4-20 mA or 0-10 volts)
-------------	---

DL	Enclosure door lock and keys
-----------	------------------------------

PRODUCT CODES

IH	Internal heater for cold environment applications down to -40°C / -40°F
-----------	---

L	Top mounted strobe, red lens, IP65 rated 6.1 cm dia x 13 cm H / 2.4 in dia x 5.2 in H)
----------	--

SW	Manual shutoff switch (meets B52 Code for refrigeration applications)
-----------	---

WA	Door mounted, water tight audible alarm, rated 85 dB @ 60.96 cm (2 ft)
-----------	--

REMOTE & PERIPHERAL DEVICES

CET-RDM	Remote Display Module, Modbus® RS-485
----------------	---------------------------------------

CET-RDM-L2	Remote Display Module with side mounted strobe, Modbus® RS-485
-------------------	--

LNK-AO	Analog Output Peripheral Device, Modbus® RS-485 with four 4-20 mA outputs
---------------	---

RLY-4	Remote Relay Output, Modbus® RS-485 with four relays, rated 5A @ 240 volts each plus 2 horn/strobe output drives 5A @ 24 VDC max
--------------	--

RLY-8	Remote Relay Output, Modbus® RS-485 with eight relays, rated 5A @ 240 volts each plus 2 horn/strobe output drives 5A @ 24 VDC max
--------------	---

RSA-24V	Remote LED strobe light with audible, red lens, 8.9 cm / 3.5", comes with mounting bracket
----------------	--

RSH-24V-A RSH-24V-B RSH-24V-R	Remote Horn/Strobe Combo, unmounted, 24 VAC/VDC, rated 99 dB @ 3 m (10 ft) (VAC), 97 dB @ 3 m (10 ft) (VDC) Choice of Amber, Blue or Red lens
--	--

HORN 120V	Surface mount Industrial Horn, rated 78 to 103 dB @ 3 m (10 ft), includes mounting bracket, indoor use only
------------------	---

HORN 120V-W	Conduit or surface mount Industrial Horn, rated 78 to 103 dB @ 3 m (10 ft), includes mounting bracket, NEMA 4X, indoor or outdoor use
--------------------	---

Maximums	8 analog inputs 8 analog outputs 12 relays (maximum 8 remote) 6 horn/strobe drives 4 remote display modules
-----------------	---

ACCESSORIES

SCS-8000-SPG	Metal protective guard, large, 16 gauge, galvanized metal guards for controller
---------------------	---

CET-SS	Wall mounted adjustable outdoor sun shade, cover protects from sun, glare and inclement weather
---------------	---



BACnet® is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE). Modbus® is a registered trademark of Gould Inc. Corporation.

© 2024 Critical Environment Technologies Canada Inc. | Data subject to change without notice. | Toll Free: +1.877.940.8741 | www.critical-environment.com | 0426



Distributed by: Kenelec Scientific Pty Ltd | 1300 73 22 33 | sales@kenelec.com.au | www.kenelec.com.au